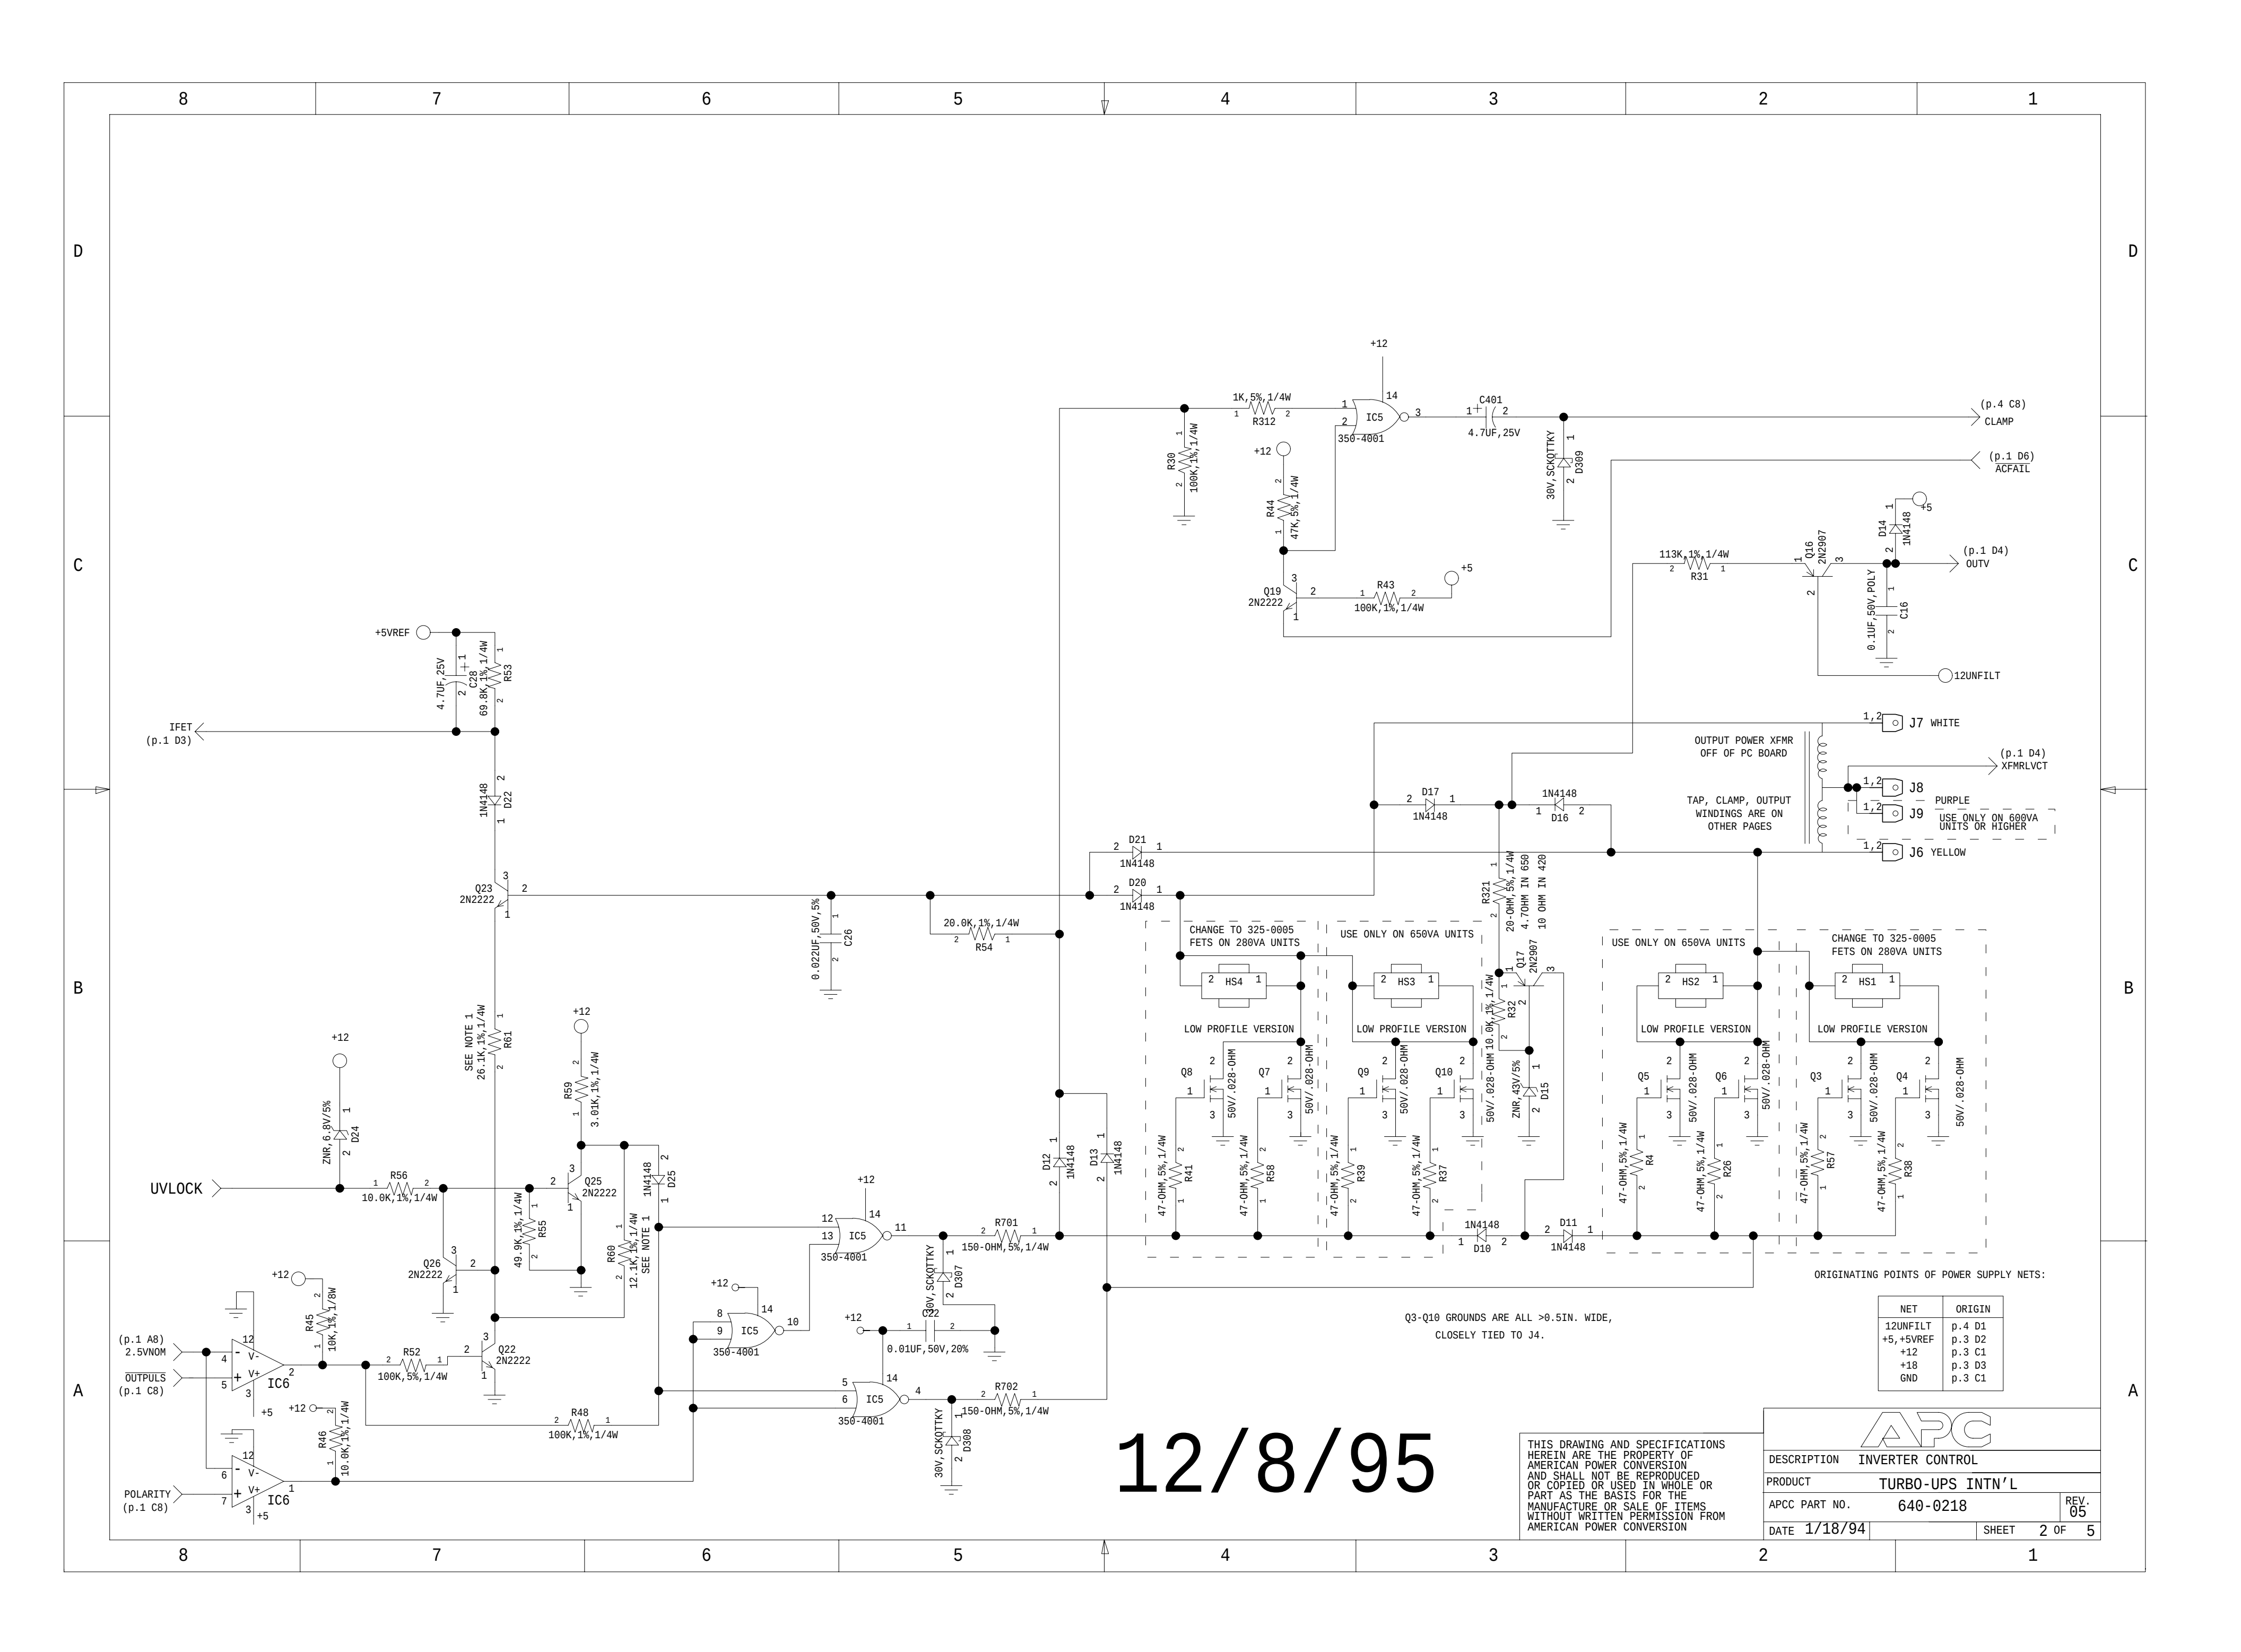


CLAMP (p.4 C8)
ACFAIL (p.1 D6)
OUTV (p.1 D4)
12UNFILT
IFET (p.1 D3)
+5VREF
UVLOCK
(p.1 A8) 2.5VNOM
OUTPULS (p.1 C8)
POLARITY (p.1 C8)
XFMRLVCT (p.1 D4)
J7 WHITE
J8 PURPLE
J9
J6 YELLOW
USE ONLY ON 600VA UNITS OR HIGHER
OUTPUT POWER XFMR OFF OF PC BOARD
TAP, CLAMP, OUTPUT WINDINGS ARE ON OTHER PAGES
CHANGE TO 325-0005 FETS ON 280VA UNITS
USE ONLY ON 650VA UNITS
LOW PROFILE VERSION
Q3-Q10 GROUNDS ARE ALL >0.5IN. WIDE, CLOSELY TIED TO J4.
ORIGINATING POINTS OF POWER SUPPLY NETS:
NET | ORIGIN
12UNFILT | p.4 D1
+5,+5VREF | p.3 D2
+12 | p.3 C1
+18 | p.3 D3
GND | p.3 C1
12/8/95
THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF AMERICAN POWER CONVERSION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM AMERICAN POWER CONVERSION
APC
DESCRIPTION INVERTER CONTROL
PRODUCT TURBO-UPS INTN'L
APCC PART NO. 640-0218
REV. 05
DATE 1/18/94
SHEET 2 OF 5